

RT-3 PLUS

FEATURES AND BENEFITS

- Temperature range room to +300°C.
- Double guidance of the geometries for a better repeatability.
- Compatible with concentric cylinder and cone plate.
- Compatible from RM 100 PLUS.
- Use of aluminium disposable cup.


ACTIVITY DOMAINS



Paint / ink / coatings



Chemical / petroleum products

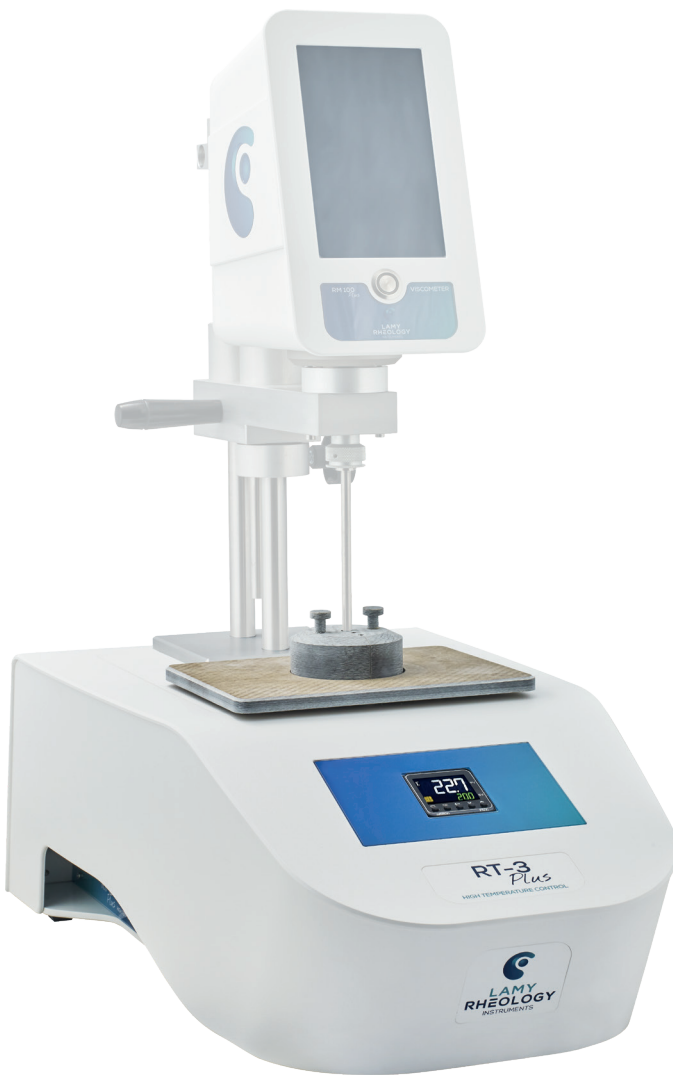

TEMPERATURE CONTROL DEVICES AVAILABLE

(Not compatible with B-ONE/FIRST and LR version device)

Compatible only with AC 115 coupling device

Designation	Part Number	Temperature range	Type	Prog ^{a)}	Compatible device	Compatible Measuring system	Size (pxhx) in mm	Weight
RT3 PLUS	N320000	Room to +300°C	Electrical	No	RM100, RM200, DSR 500	MS HT	610x340x650	15Kg
RT3 PLUS	N320100	Room to +300°C	Electrical	Yes				

a) Allow temperature setting by RheoTex software or measuring head